

ZP7-SB1-P

ZP7 Series point detector base

Product overview

The ZP7-SB1-P is a standard, POLAR WHITE mounting base allowing any ZP700/ZX800 series addressable detector to be removed or replaced without disconnecting loop wiring from detector terminals. The detectors plug into the base with a simple twist and lock action, allowing quick and easy removal for cleaning and servicing, or re-selection of the device type should the usage of the protected area change.

Forming an integral part of the overall detector assembly, this standard base is provided with slots for screw fixing direct to ceiling structures, to auxiliary wiring plates, or conduit boxes with screw fixing centres between 50 mm and 90 mm.


Robust wiring terminals

The base features robust wiring terminals with captive clamping washers to ensure secure wiring termination. They are of shallow design with ample space to accommodate cables of all types. Terminals are provided inside the moulding for loop connections and the termination of cable screening. Provision is also made for the connection of a remote LED when required.

Automatic locking option

In order to prevent unauthorised removal of a detector from its base, an automatic locking breakout is incorporated into all detector mouldings. If the breakout is removed, detectors can only be released from their bases by use of a special tool. The locking facility is an easily applied option often implemented on site at the system commissioning stage.

Matching spaces for address labels are provided on detector and base mouldings ensuring that when removed, they are replaced in the correct location. The address number facility also enables detectors to be easily identified when viewed from floor level.

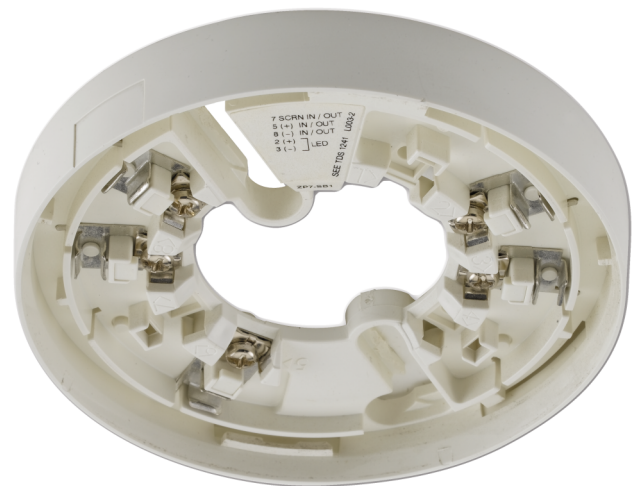

Details

- Common to all ZP7 series detectors
- Automatic locking option
- Address identification label
- Easy to install

ZP7-SB1-P

ZP7 Series point detector base

Technical specifications

General

Compatibility	ZP7 Series systems
Connectivity	2 core loop or spur

Electrical

Operating voltage	16 to 22 VDC
Communication voltage	20 V
No. of cable cores	2
Terminals	5 (Loop +ve in/out, Loop -ve in/out, Cable screen continuity, Remote LED +ve, Remote LED -ve)

Physical

Physical dimensions	108 x 18 mm (Ø x H)
Net weight	52 g
Colour	Polar white
Mounting type	Back box, Ceiling mount
Cable entries	1
Material (body)	Moulded ABS

Environmental

Vandal proof	No
Operating temperature	-10 to +75°C
Relative humidity	20 to 95% noncondensing
Environment	Indoor
IP rating	IP42 (EN60529)

Regulatory

Compliance	CE, REACH, RoHS 2, WEEE
Certification	CPR
Standards	EN54 (with detector)
Environmental	EEC89/336

Compatible products

Category	Reference	Description
Detection device	KE-DBA-ADPW-ZIT	Intelligent addressable base accessory - Ziton adapter (White)
Detection device	Z-AUXD-2P	Deep base mounting, polar white
Detection device	ZP720-3P	ZP Series addressable heat detector
Detection device	ZP730-2P	ZP7 Series addressable optical detector
Detection device	ZP732-2P	ZP7 Series Addressable Dual Detector (Optical & Heat), Polar White
Detection device	ZX832-3P	ZP7 Series addressable multisensor (optical / heat)
Notification device	122301	Z-RL3 Remote LED w/ "Fire" Text, Square
Notification device	Z-RL4	Remote LED Indicator - Square
Notification device	ZP755-COV-P	ZP7 Series Detector Base Cover (Polar White)



As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 7 January 2025 - 10:36